


### B.FR.150 | Pre-fabricated unit single pipe


Arrangement	15 mm Plaster-board BEKA single pipe PE-RT 5-layer composite pipe, oxygen diffusiontight
Ø Pipe	10 x 1,1 mm
Length (L) Width (B)	2000 mm 1250 mm (other dimensions on request)
Color	untreated
Massis filled Active area Water contents	26,0 kg (9,39 kg/m <sup>2</sup> ) 2,5 m <sup>2</sup> 1,375 l (0,55 l/m <sup>2</sup> )
Cooling capacity Heating capacity Allowed heating water temp. Allowed operating pressure	39 W/m <sup>2</sup> at ΔT 8 K 57,04 W/m <sup>2</sup> ΔT 15 K 60°C 10 bar
Connection	with quick-action couplings
Operation area	heating/cooling ceilings

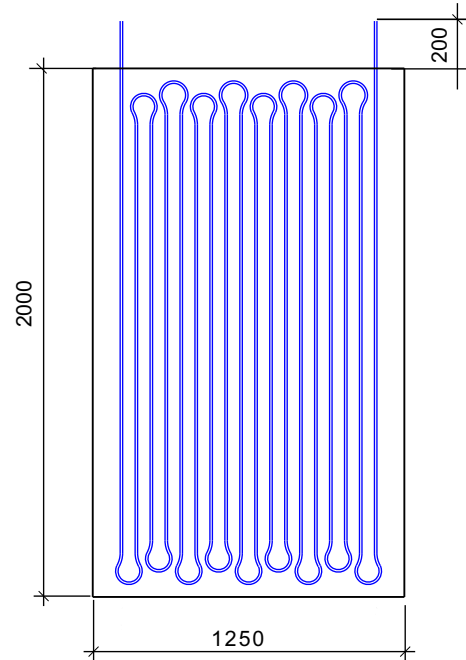

Ordering example:

BEKA Pre-fabricated single pipe Type B.FR.150 Length 2000 mm Width 1250 mm, 2 connections: B.FR.150.2000.1250.20

Cooling capacity pre-fabricated unit single pipe B.FR.150

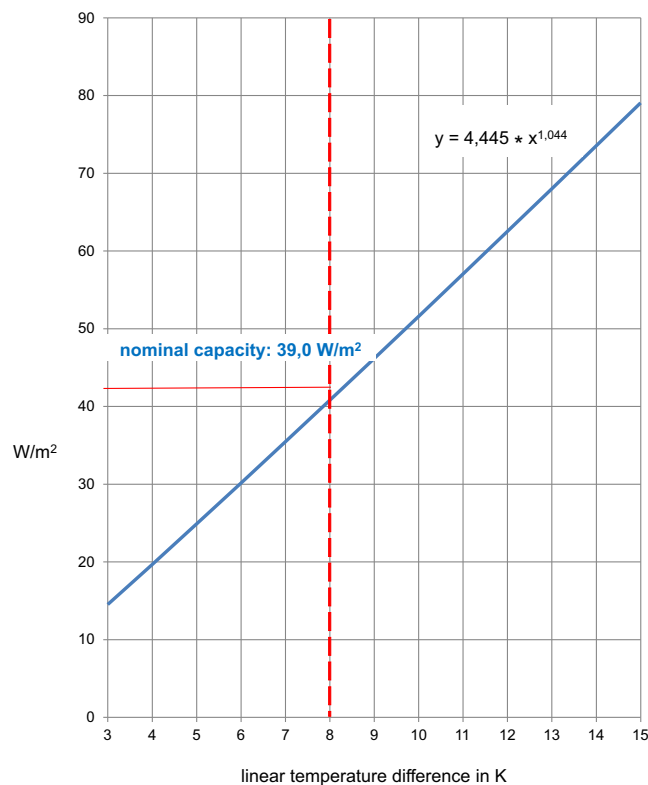

Heating capacity pre-fabricated unit single pipe B.FR.150

